


55UD Flow-Thru Humidifier

Under-Duct Flow-Thru Humidifier with Manual Humidistat

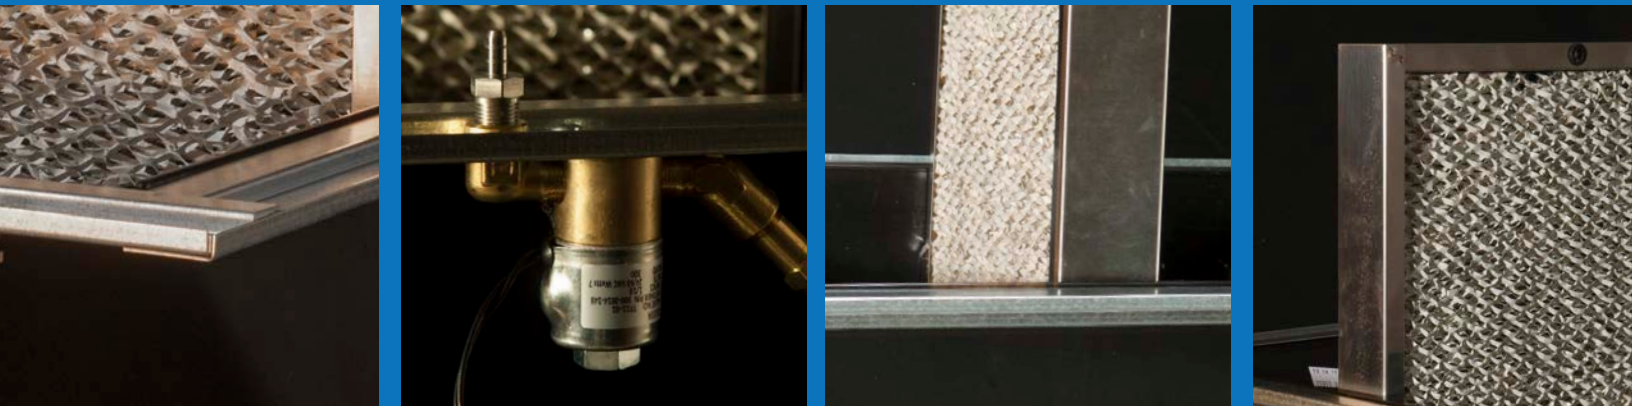

Humidifier for Warm Air Furnaces and High-Efficiency Heating Systems

Model 55UD Product Features

Skuttle Under Duct Humidifiers are real workhorses that perform well on heat pumps and high-efficiency heating systems. In fact, they are superior to plenum-mount flow-thrus on today's 90-plus furnaces.

- Highest performing unit, perfect for large homes
- Easy to maintain – unique mounting frame allows easy removal from duct for cleaning and servicing
- Durable, corrosion-resistant thermoplastic cabinet helps ensure long life
- Energy efficient technology uses minimal electricity
- Great in hard water applications



www.skuttle.com Made in the U.S.A.

Moisture Output Capacity

Temp (Warm Air Duct)	Lbs/Hour	Gal/Day
120°F	6.95	20.0
110°F	6.54	18.8
100°F	5.22	15.0

Specifications

Dimensions/Reservoir	6-3/8"H x 15-1/4"W x 19-1/2"D
Extension into Duct	7-5/8"
Extension below Duct	6-3/8"
Duct Opening	12 x 16"
Minimum Duct Width	12"
Solenoid	24VAC
Evaporator Pad	12 3/4"H x 10-7/8"W x 1-5/8"D
Pad Replacement No.	A04-1725-045

Home/Humidifier Sizing Range

Model	Tight House	Loose House
Square Feet	4,762	2,174
Cubic Feet	38,095	17,391

Model 55UD Under Duct Flow-Thru Humidifier

- Mountable on horizontal ducts as small as 12" wide and 8" high
- With normal maintenance, they cause no airflow resistance.

IMPORTANT!

For any system using a multi-speed blower motor, addition of an **A50 Interface Relay** is recommended.



Maintenance

The Model 55UD, along with its connecting water valves, must be turned OFF at the end of each heating season.



Skuttle Mfg. Co. 101 Margaret Street, Marietta, Ohio 45750

Phone: 888.SKUTTLE | Fax: 740.373.9565 (f) | customerservice@skuttle.com

www.skuttle.com Made in the U.S.A.